
05-E012-14-CM

KÖSSEL Wall fixture

DescriptionWall fixture

For frontal lighting and downlighting. Includes filters to emulate warm light. Specially designed to conceal all mounting screws. Includes easily interchangeable decorative front panels in various finishes. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Structure material: Polycarbonate + ABS. Structure finish: White. Diffuser material: Polycarbonate. Diffuser finish: Transparent. UV protection. Warranty: 5 Years.



FinishWhite
Transparent

Material Polycarb

Polycarbonate + ABS Polycarbonate



Transparent

☐ IP65 ☐ 12

TECHNICAL CHARACTERISTICS

Light source

Light source: LED EDISON
Output (W): 6.4 W
Total power consumption (W): 7 W
Color temperature: Neutral white 4000K
CRI: 80
Real Lumen: 295
Nominal Lumen: 825
Qty Leds: 18
Lm/Real W: 49
Life Time: 59.000h L70B30
Bin / Grup: 403
MacAdam steps: 3 STEPS
UGR: 16

Photobiological risk: RG0

GEAR Prond

Brand: EAGLERISE Gear included: Yes, electronic Voltage / Frequency: 100-240V/50-60Hz Power Factor: 0.87 Flickering: 28.1% Luminaire

Double cable exit: Yes Drainage: No Seaside: Yes Uv Protection: Yes Warranty: 5 Years


Logistics

Energy Efficiency: LED A++ EAN Code: 8435381495923 Net Weight (Kg): 0.500 Weight in Kg (packaged): 1.126 Packing: - x - x -

Packing: - x - x Masterbox: 12

The photograph may not match the reference exactly. Please read the product description to identify the finish.

VO

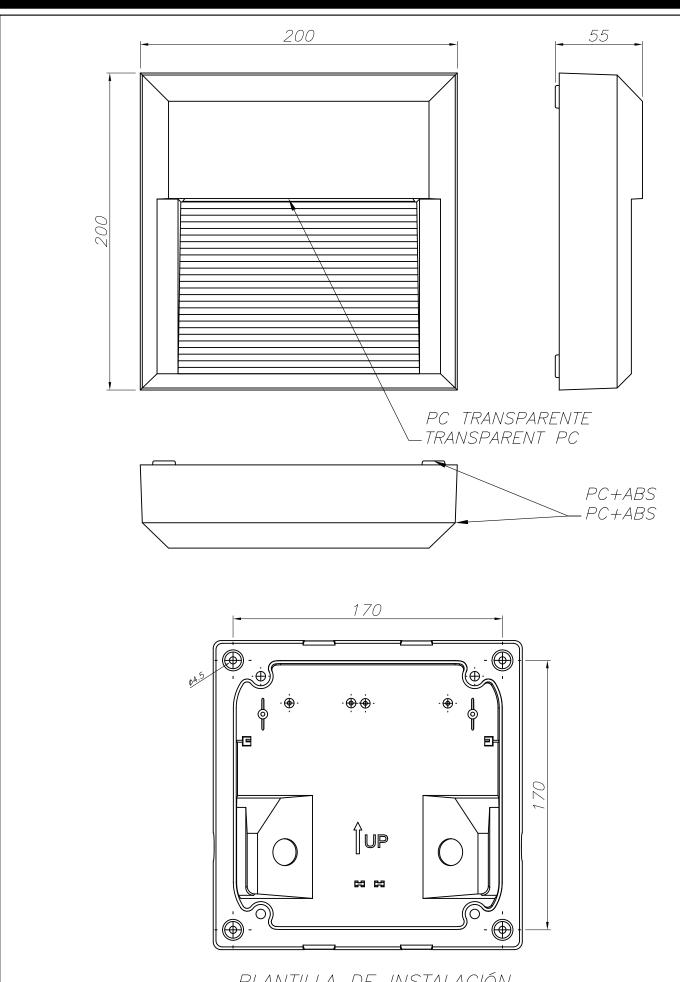

PLANTILLA DE INSTALACIÓN INSTALLATION TEMPLATE



OUTDOOR

05-E012

